

TAKENOW®

DURABLE MOBILE LIGHTING

TAKENOW®

YUYAO YUCHANG ELECTRICAL APPLIANCE CO.,LTD.

#18 North Section, Tongji Road ,Sibei Industrial Zone ,Simen Town
Yuyao ,Zhejiang 315470 ,China

☎ +86-574-62060027 🌐 www.takenow.com ✉ takenow@takenow.com

2022

© TAKENOW Design 1st Version

MOBILE LIGHTING LEADER

COMPANY INTRODUCTION

Yuyao Yuchang Electrical Appliance Co.,Ltd. is a leading global mobile lighting solutions provider, who integrates research and development, processing and manufacturing, sales operating into a whole. We stick to prudent management, continuous innovation, open cooperation. Bearing the company mission " Make the light go at will, providing the Most intelligent lighting solution for the society ", we are focusing on the professional and industrial area such as vehicle maintenance, industrial manufacturing, construction, safety protection, metallurgy, mining etc., and offering the customer competitive solutions, products and services according to customers' actual demand, continuing to create long-term value for customers and the whole society.

BRAND INTRODUCTION **TAKENOW®**

TAKENOW® is the global High-end mobile light brands owned by Yuyao Yuchang Electrical Appliance Co.,Ltd. TAKENOW® is motivated by User experience. Base on that, we will explore the innovation of lighting technology and develop the professional, high-performance, high reliability robust work lights Continuously. The quality and multinomial technical indexes of our productions have reached or exceeded the level of DIN (Germany standard), ANSI (US standard), GB (China standard) or other leading standards. TAKENOW® means that our team is steel-willed and extroverted, with huge enthusiasm to cherish now and next, providing the most intelligent mobile lighting solutions for society



RoHS



EAC



MOBILE LIGHTING LEADER

TAKENOW®

TAKENOW
F181 120112



© www.takenow.com

DUSTPROOF.

All TAKENOW's products are designed extremely durable and robust, from head to tail, internally and externally waterproof and dustproof for harsh conditions and dirty environments.

MOBILE LIGHTING LEADER

TAKENOW®



www.takenow.com

WATERPROOF.

All TAKENOW's products are designed extremely durable and robust, from head to tail, internally and externally waterproof and dustproof for harsh conditions and dirty environments!

TAKENOW® CONTENTS



Aluminium Flash Light

P10-15



Head Lamp

P16-23



Wireless Charging Series

P24-27



Inspection Hand Lamp

P28-39



Emergency light

P40-43



FLYCOLOR

P44-49



FLYCURE 4

P50-53



Underhood Light

P54-57



Flood & Area Light

P58-71



Portable Power Station

P72-73

Aluminium Flash Light

TAKENOW®

F101

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot Light: 100 lm / 12 hrs
High Quality 2xAAA
Alkaline Batteries
IPX8, IK07



100
lumens
Max

12h
Max



Weight (g): 40
Size (mm): 134x15x15

F102

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot Light Low: 100 lm / 6 hrs
Spot Light High: 400 lm / 2.5 hrs
Flood Light Low: 50 lm / 14 hrs
Flood Light High:
160 lm / 4.5 hrs
High Quality
3.7V750mAh
Li-ion Battery
Charging Time:
2.5 hrs
IPX4, IK07



400
lumens
Max

14h
Max

95m
Max



Weight (g): 65
Size (mm): 160x16.5x14.8

F103

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot Light Eco: 5 lm / 36 hrs
Spot Light Low: 100 lm / 6 hrs
Spot Light High: 390 lm / 2.5 hrs
High Quality 3.7V750mAh
Li-ion Battery
Charging Time: 2.5 hrs
IPX6, IK07



390
lumens
Max

36h
Max



Weight (g): 49
Size (mm): 152x16.7x16.7

F103UV

SPECIFICATIONS

UV Light: 395nm Ultraviolet LED
with 400mW
Run Time: 3.5 hrs
High Quality 3.7V750mAh
Li-ion Battery
Charging Time: 2.5 hrs
IPX6, IK07



395
nm
with 400mW

3.5h




Weight (g): 65
Size (mm): 152x16.7x16.7



Optional: 1060B

F102/ F103/F103UV

3.7V750mAh Battery Included



F141

SPECIFICATIONS

Spot Light:
Super Bright LED, 5700K
Brightness/Run Time:
Spot Light Eco: 5 lm / 22 hrs
Spot Light Low: 100 lm / 5 hrs
Spot Light High: 350 lm / 2 hrs
High Quality 2xAA
Alkaline Batteries
IPX8, IK07



350
lumens
Max

22h
Max



90m
Max



AA
x2

Weight (g): 65
Size (mm): 146x20x20

F181

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot Light Eco: 5 lm / 180 hrs
Spot Light Low: 30 lm / 38 hrs
Spot Light Medium: 350 lm / 4 hrs
Spot Light High: 1000 lm / 3 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IPX8, IK07



1000
lumens
Max

180h
Max



180m
Max



Li-ion
battery

Weight (g): 133
Size (mm): 133.5x25.4x25.4

F182

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Red Light: 620-625nm
Green Light: 515-530nm
Brightness/Run Time:
Spot Light Eco: 5 lm / 105 hrs
Spot Light Low: 30 lm / 32 hrs
Spot Light Medium: 350 lm / 4 hrs
Spot Light High: 1200 lm / 2.5 hrs
Red Light: 150 lm / 4 hrs
Green Light:
200 lm / 4 hrs
High Quality
3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IPX8, IK07



1200
lumens
Max

105h
Max



300m
Max



Li-ion
battery

Weight (g): 175
Size (mm): 147x37x37

Optional: 1826AU



F181 / F182

3.7V2600mAh Battery Included



Head Lamp

TAKENOW®

HL001

Weight (g): 111
Size (mm): 78.5x47.5x42



SPECIFICATIONS

Flood Light: Super Bright COB LED, 6500K

Brightness/Run Time:

Flood Light Low: 100 lm / 6 hrs

Flood Light High: 300 lm / 2 hrs, High Quality 3.7V1500mAh Li-Po Battery

Charging Time: 2.5 hrs, IP65, IK07

HL003

Weight (g): 111
Size (mm): 78.5x47.5x42



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Flood Light: Super Bright LED, 6500K

Brightness/Run Time:

Spot Light: 200 lm / 6 hrs

Flood Light Low: 20 lm / 30 hrs, Flood Light Medium: 200 lm / 8 hrs

Flood Light High: 400 lm / 4 hrs, High Quality 3.7V1500mAh Li-Po Battery

Charging Time: 2.5 hrs, IP65, IK07

HL005

Weight (g): 45
Size (mm): 46x30x32



SPECIFICATIONS

Flood Light: Super Bright COB LED, 6500K

Brightness/Run Time:

Flood Light Low: 100 lm / 4 hrs, Flood Light High: 200 lm / 2 hrs

High Quality 3.7V600mAh Li-Po Battery, Charging Time: 2.5 hrs

IP65, IK07



RED LIGHT

Protect Night Vision,
free from close-in zing.

HL013S



HL013

Weight (g): 82.3
Size (mm): 68.8x46.2x35.8



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Flood Light: Super Bright LED, 6500K

Brightness/Run Time:

Spot Light: 250 lm / 6 hrs, Flood Light Low: 20 lm / 40 hrs,

Flood Light Medium: 200 lm / 8 hrs, Flood Light High: 300 lm / 3 hrs,

High Quality 3xAAA Alkaline Batteries

IP65, IK07

HL013S

Weight (g): 83
Size (mm): 68.8x46.2x35.8



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Flood Light: Super Bright LED, 6500K

Red Light: Super Red LED

Brightness/Run Time:

Spot Light Low-High: 20-400 lm / 60-5 hrs,

Flood Light Low-High: 15-200 lm / 60-8 hrs, Red Light Low-High: 0.5-20 lm /

70-10.5 hrs, High Quality 3xAAA Alkaline Batteries

IP65, IK07

HL011

Weight (g): 192
Size (mm): 41x45x60



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Brightness/Run Time:

Spot Light Low: 20 lm / 60 hrs, Spot Light Medium: 200 lm / 6 hrs

Spot Light High: 800 lm / 3 hrs,

High Quality 3.7V2600mAh Li-ion Battery

Charging Time: 4 hrs, IP65, IK07

HL012

Weight (g): 210
Size (mm): 85x60x31



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Red Safety Tail Light, Lighting / Blinking Modes

Brightness/Run Time:

Spot Light Low: 30 lm / 80 hrs, Spot Light Medium: 150 lm / 15 hrs

Spot Light High: 400 lm / 6 hrs,

High Quality 3xAA Alkaline Batteries, IP65, IK07

HL022

Weight (g): 175
Size (mm): 68x41x30



4500K
6500K
Ra 90+



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Flood Light: Super Bright LED, Ra 90+, 4500K

Brightness/Run Time:

Spot Light: 400 lm / 5 hrs, Flood Light Low: 20 lm / 30 hrs

Flood Light Medium: 150 lm / 10 hrs, Flood Light High: 300 lm / 5 hrs

Spot Light+ Flood Light: 600 lm / 4 hrs, High Quality 3.7V2600mAh Li-ion Battery, Charging Time: 4 hrs, IP65, IK07

HL023

Weight (g): 175
Size (mm): 68x39x26



4500K
6500K
Ra 90+



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K; Flood Light: Super Bright LED

Ra 90+, 4500K. Red Safety Tail Light, Lighting / Blinking Modes

Brightness/Run Time:

Spot Light: 400 lm / 6 hrs, Flood Light Low: 30 lm / 90 hrs

Flood Light Medium: 150 lm / 12 hrs, Flood Light High: 300 lm / 6 hrs

Spot Light+ Flood Light: 500 lm / 4 hrs

High Quality 3xAA Alkaline Batteries, IP65, IK07

HL008

Weight (g): 59
Size (mm): 44.7x39x31



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Flood Light: Super Bright COB LED, 6500K

Brightness/Run Time:

Spot Light: 250 lm / 2 hrs

Flood Light Low: 20 lm / 12 hrs, Flood Light Medium: 100 lm / 4 hrs

Flood Light High: 300 lm / 2 hrs, High Quality 3.7V600mAh Li-Po Battery

Charging Time: 2.5 hrs, IP65, IK07

HL009

Weight (g): 75
Size (mm): 68.8x46.2x38.8



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K

Flood Light: Super Bright COB LED, 6500K

Brightness/Run Time:

Spot Light: 400 lm / 2 hrs, Flood Light Low: 20 lm / 14 hrs,

Flood Light Medium: 200 lm / 4 hrs, Flood Light High: 400 lm / 2 hrs,

High Quality 3.8V1100mAh Li-Po Battery

Charging Time: 3.5 hrs, IP65, IK07



QUICK COLOR CONTROLLER™

HL019

Stepless Dimming Switch



LIGHTWEIGHT MOTION SENSOR CAP LIGHT




SPECIFICATIONS

Spot Light: Super Bright LED, 6500K; Red Light: Super Red LED
Brightness/Run Time:
 Spot Light Low/High: 20-200 lm / 14-2 hrs,
 Red Light Low/High: 1-20 lm / 30-5 hrs,
 High Quality 3.7V600mAh Li-ion Battery; Charging time: 2.5 hours
 IP54, IK07

Weight (g): 40
Size (mm): 40x49x29



Clip On the Safety Helmet

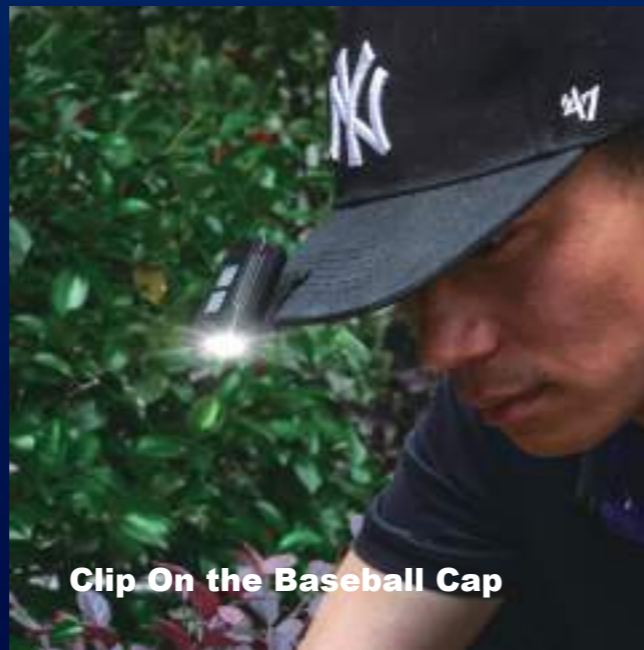

Clip On the Baseball Cap

WHITE: 20-200ml
Stepless Dimming Switch



RED: 1-20ml
Stepless Dimming Switch



Motion Sensor Switch



HL027

RECHARGEABLE NECK LIGHT



Weight (g): 140
Size (mm): 230x130x45



SPECIFICATIONS

Spot Light: Super Bright LED, 5700K
Brightness/Run Time:
 Spot Light Low: 150 lm / 5 hrs; Spot Light High: 300 lm / 2 hrs
 High Quality 3.7V700mAh Li-ion Battery
 Charging Time: 2.5 hrs; IP54, IK07

Wireless Charging Series

TAKENOW®



- HL007

Wireless Charging Headlight

- WL6050

Wireless Charging Twin Beam Pocket light

- WL3060

Wireless Charging 1000lm Flashlight

- WL3016W

Wireless Charging Multi-functional Inspection Light

- PJ1050

Wireless Charging Single pad

- PJ1060

Wireless Charging Dual pad

(☉) HL007

Weight (g): 126
Size (mm): 70x52x45.3



SPECIFICATIONS

Spot Light: Super Bright LED, 6500K
Flood Light: Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light Low: 400 lm / 4 hrs, Flood Light Low: 25 lm / 21 hrs,
Flood Light Medium: 200 lm / 8 hrs, Flood Light High: 420 lm / 4 hrs,
High Quality 3.7V1500mAh Li-ion Battery
Direct Charging Time: 3.5 hrs, Wireless Charging Time: 4.5 hrs, IP65, IK07

400 lumens Max
Magnet
125°
IP65
2m IK07

(☉) WL6050

Weight (g): 281
Size (mm): 97x39x83



SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light Low: 250 lm / 4.5 hrs
Flood Light Low: 120 lm / 10 hrs
Flood Light Medium: 350 lm / 4.5 hrs
Flood Light High: 700 lm / 2.5 hrs
High Quality 3.7V2600mAh Li-ion Battery
Charging Time: 4 hrs
IP65, IK07

700 lumens Max
Magnet x2
IP65
2m IK07

(☉) PJ1050

Weight (g): 335
Size (mm): 190.5x101.2x28.1



SPECIFICATIONS

Input AC 100-240V 50/60Hz to 12V1.5A / 9V2A / 5V3A
Input AC 100-240V 50/60Hz to 5V2A
Wireless Charging Output: 10W, IP20, IK07

Wireless Charging
10W Input
Phone Charge
Magnets

(☉) PJ1060

Weight (g): 500
Size (mm): 290.5x101.2x28.1



SPECIFICATIONS

Input AC 100-240V 50/60Hz to 12V1.5A / 9V2A / 5V3A
Wireless Charging Output: Single 10W / Dual Max 18W
IP20, IK07

Wireless Charging
10W x2 Input
Phone Charge
Magnets

(☉) WL3060

SPECIFICATIONS

Spot Light:
Super Bright SMD LED, 6500K
Brightness/Run Time:
Spot Light Eco: 5 lm / 200 hrs
Spot Light Low: 35 lm / 25 hrs
Spot Light Medium: 400 lm / 4 hrs
Spot Light High: 1000 lm / 2 hrs
High Quality 3.7V2600mAh Li-ion Battery
Charging Time: 4 hrs
IP68, IK07



1000 lumens Max
Magnet
IP68
2m IK07

Weight (g): 215
Size (mm): 159x41x41

(☉) WL3016W

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light Low: 200 lm / 7 hrs
Flood Light Low: 250 lm / 7.5 hrs
Flood Light Medium: 500 lm / 3.5 hrs
Flood Light High: 1000 lm / 1.7 hrs
High Quality 3.7V3350mAh Li-ion Battery
Charging Time: 4.5 hrs
IP65, IK09



1000 lumens Max
180°
Hooks x2
Magnets x3
IP65
2m IK09

Weight (g): 396
Size (mm): 53x39.3x260



Inspection Lamp

TAKENOW®

PL017

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light Low: 200 lm / 2 hrs
Flood Light Low: 100 lm / 5 hrs
Flood Light High: 300 lm / 2 hrs
High Quality 3.7V700mAh
Li-ion Battery
Charging Time: 2.5 hrs
IP54, IK07

300
lumens
Max



Weight (g): 61
Size (mm): 15.2x21.2x170.2



PL018

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Laser Light:
Red Light: 640-660nm
Brightness/Run Time:
Spot Light Low: 100 lm / 3 hrs
Flood Light Low: 100 lm / 5.7 hrs
Flood Light High: 300 lm / 2.4 hrs
Laser Light: 0.4-0.95 mW / 70 hrs
High Quality 3.7V700mAh Li-ion Battery
Charging Time: 2.5 hrs
IP54, IK07

300
lumens
Max



Weight (g): 62.3
Size (mm): 15.2x21.2x170.2



PL012

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot Light: 80 lm / 4.5 hrs
Flood Light: 120 lm / 3.5 hrs
High Quality 3.7V750mAh
Li-ion Battery
Charging Time: 2.5 hrs
IP20, IK07

120
lumens
Max



Weight (g): 57.5
Size (mm): 26.3x21.5x170



PL009

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 4.5 hrs
Flood Light Low: 100 lm / 5.5 hrs
Flood Light High: 350 lm / 1.5 hrs
High Quality 3.7V1100mAh
Li-ion Battery
Charging Time: 2.5 hrs
IP20, IK07

350
lumens
Max



Weight (g): 104
Size (mm): 35x25x190



PL013

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot Light: 80 lm / 6 hrs
Flood Light: 200 lm / 2.5 hrs
High Quality 3.7V1100mAh
Li-ion Battery
Charging Time: 3 hrs
IP20, IK07

200
lumens
Max



Weight (g): 81
Size (mm): 27x22x172



PL015

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 2.8 hrs
Flood Light Low: 60 lm / 6 hrs
Flood Light High: 200 lm / 2 hrs
High Quality 3.7V700mAh
Li-Po Battery
Charging Time: 2.5 hrs
IP20, IK07

200
lumens
Max



Weight (g): 76
Size (mm): 28x27.5x174




PL006

SPECIFICATIONS

Flood light:
Super Bright LED, 6500K
Brightness/Run Time:
Flood light: 250 lm / 3 hrs
High Quality 3xAAA
Alkaline Batteries
IP20, IK07

250
lumens
Max



Weight (g): 94
Size (mm): 31x16x160



WL3015

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 12 hrs
Flood Light: 400 lm / 3.5 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07



400
lumens
Max



Weight (g): 320
Size (mm): 55.5x45x255

WL4010

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 170 lm / 5.5 hrs
Flood Light Low: 150 lm / 7.5 hrs
Flood Light Medium: 300 lm / 3.5 hrs
Flood Light High: 700 lm / 2 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK07



700
lumens
Max



Weight (g): 380
Size (mm): 59x41.5x230

WL4015

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 100 lm / 12 hrs
Flood Light Low: 200 lm / 4 hrs
Flood Light High: 600 lm / 1.5 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07



600
lumens
Max



Weight (g): 210
Size (mm): 56x33.6x190

WL5016

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 100 lm / 12 hrs
Flood Light Low: 200 lm / 4 hrs
Flood Light High: 600 lm / 1.5 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07



600
lumens
Max



Weight (g): 210
Size (mm): 56x33.6x190

WL3016

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 200 lm / 5 hrs
Flood Light Low: 200 lm / 8 hrs
Flood Light Medium: 400 lm / 4 hrs
Flood Light High: 700 lm / 2 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK09



700
lumens
Max



Weight (g): 385
Size (mm): 53x39.3x260

WL3016S

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 200 lm / 7 hrs
Flood Light Low: 250 lm / 8 hrs
Flood Light Medium: 500 lm / 4 hrs
Flood Light High: 1000 lm / 2 hrs
High Quality 3.7V3350mAh
Li-ion Battery
Charging Time: 4.5 hrs
IP65, IK09



1000
lumens
Max



Weight (g): 385
Size (mm): 53x39.3x260



WL3110

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light Front:
Super Bright COB LED, 6500K
Flood Light Rear:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 70 lm / 3 hrs
Flood Light Front Low: 100 lm / 1.7 hrs
Flood Light Front High: 100 lm / 3 hrs
Flood Light Rear: 180 lm / 1.7 hrs
High Quality 3.7V700mAh
Li-ion Battery
Charging Time: 2.5 hrs
IP20, IK07

200
lumens
Max

TRIPLE
LIGHTS

180°

Magnet

2m
IK07



Weight (g): 80.5

Extend (mm): 29.2x17x305.7

Fold (mm): 29.2x17x163.6

WL3130

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light Front:
Super Bright COB LED, 6500K
Flood Light Rear:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 50 lm / 3.5 hrs
Flood Light Front Low: 50 lm / 6 hrs
Flood Light Front High: 100 lm / 3 hrs
Flood Light Rear: 100 lm / 3.5 hrs
High Quality 3.7V350mAh
Li-ion Battery
Charging Time: 2.5 hrs
IP20, IK07

100
lumens
Max

TRIPLE
LIGHTS

180°

Magnet x4

2m
IK07



Weight (g): 60.6

Extend (mm): 23.5x19.2x224

Fold (mm): 30.1x19.2x119.8

WL3006

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 9 hrs
Flood Light Low: 70 lm / 16 hrs
Flood Light High: 700 lm / 2 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07

700
lumens
Max

180°

Hook

Magnet

IP54

2m
IK07

180°
Horizontal
Adjustable
Slim Light

Stepless Dimming Switch



Weight (g): 373

Extend (mm): 66.5x46x397

Fold (mm): 66.5x46x220.6

WL3150

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light Front:
Super Bright COB LED, 6500K
Flood Light Rear:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 80 lm / 5 hrs
Flood Light Front Low: 100 lm / 6 hrs
Flood Light Front High: 300 lm / 3 hrs
Flood Light Rear: 200 lm / 3 hrs
High Quality 3.7V1100mAh
Li-ion Battery
Charging Time: 3 hrs
IP20, IK07

300
lumens
Max

TRIPLE
LIGHTS

180°

Magnet x4

2m
IK07



Weight (g): 98

Extend (mm): 26x20.6x298

Fold (mm): 33x20.6x156

WL3150



WL3006



WL3007



WL3001

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 10.5 hrs
Flood Light Low: 250 lm / 5.5 hrs
Flood Light High: 620 lm / 2.5 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07

620
lumens
Max



120°



Magnet



IP54



2m
IK07



Weight (g): 300

Size (mm): 61x41.5x340

WL3020

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 9.5 hrs
Flood Light Low: 60 lm / 16 hrs
Flood Light High: 700 lm / 1.8 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07

700
lumens
Max



360°



Magnet



Hook



IP54



2m
IK07



Weight (g): 253

Size (mm): 40x44.5x384

WL3100

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 9 hrs
Flood Light Low: 50 lm / 25 hrs
Flood Light High: 500 lm / 2 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4.5 hrs
IP54, IK07

500
lumens
Max



Flexible



Magnet



Hook



IP54



2m
IK07



Weight (g): 290

Size (mm): 475x65.5x44.5

WL3101

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Front Flood Light Low: 50 lm / 25 hrs
Front Flood Light High: 500 lm / 2 hrs
Rear Flood Light Low: 50 lm / 25 hrs
Rear Flood Light High: 500 lm / 2 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07



Magnet x2

FRONT
Magnet
on top



BACK
Magnet
on top



Weight (g): 325

Size (mm): 475x65.5x44.5

WL3102

SPECIFICATIONS

Flood Light:
Super Bright LED, 6500K
Brightness/Run Time:
Flood Light Low: 80 lm / 24 hrs
Flood Light Mid 200 lm / 7.5 hrs
Flood Light High: 400 lm / 4.5 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK07

400
lumens
Max



Flexible



Magnet



Hook



IP65



2m
IK07



Weight (g): 442

Size (mm): 46.7x37x678

WL3021

SPECIFICATIONS

Spot Light:
Super Bright LED, 6500K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light: 120 lm / 11.5 hrs
Flood Light Low: 50 lm / 30 hrs
Flood Light High: 750 lm / 3.5 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP54, IK07

750
lumens
Max



360°



Magnet x3



Hook



IP54



2m
IK07



Weight (g): 292

Size (mm): 44.5x40x384

WL3004

SPECIFICATIONS

Spot Light:
Super Bright LED, 7000K
Flood light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot light: 80 lm / 18 hrs
Flood light Low: 200 lm / 10 hrs
Flood light High: 350 lm / 4.5 hrs
High Quality 3xAA
Alkaline Batteries
IP20, IK07

350
lumens
Max



120°



Magnet



2m
IK07



AA
3 AA



Weight (g): 212

Size (mm): 60.5x41.5x340



WL6003

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood light:
Super Bright LED, 6500K
Brightness/Run Time:
Spot light: 250 lm / 8 hrs
Flood Light Low: 150 lm / 8 hrs
Flood Light High: 600 lm / 3 hrs
High Quality 3.7V2600mAh
Li-ion Battery
IP65, IK07

Weight (g): 185
Size (mm): 117x50x34



WL6016

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 250 lm / 4 hrs
Flood Light Low: 120 lm / 10 hrs
Flood Light Medium: 350 lm / 4.5 hrs
Flood Light High: 700 lm / 2.7 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK07

Weight (g): 210
Size (mm): 80x35.5x93.5



WL6017

SPECIFICATIONS

Spot Light:
Super Bright LED, 6000K
Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Spot Light : 400 lm / 6.3 hrs
Flood Light Low: 350 lm / 7 hrs
Flood Light Medium: 700 lm / 4 hrs
Flood Light High: 1400 lm / 3 hrs
High Quality 3.7V5200mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK07

Weight (g): 434
Size (mm): 101x41.5x116



WL6012

SPECIFICATIONS

Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Flood Light Low: 100 lm / 15 hrs
Flood Light Medium: 350 lm / 4 hrs
Flood Light High: 800 lm / 2 hrs
High Quality 3.7V2600mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK07

Weight (g): 252
Size (mm): 88.5x30x93



WL6013

SPECIFICATIONS

Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Flood Light Low: 350 lm / 8 hrs
Flood Light Medium: 700 lm / 3.5 hrs
Flood Light High: 1400 lm / 2.5 hrs
High Quality 3.7V5200mAh
Li-ion Battery
Charging Time: 4 hrs
IP65, IK07

Weight (g): 460
Size (mm): 114x36x124.5



WL6010

SPECIFICATIONS

Flood Light:
Super Bright LED, 6500K
Brightness/Run Time:
Flood Light Low: 100 lm / 8 hrs
Flood Light High: 300 lm / 3 hrs
High Quality 3.7V1500mAh
Li-Po Battery
Charging Time: 2.5 hrs
IP54, IK07

Weight (g): 182
Size (mm): 63x32x128



WL6011

SPECIFICATIONS

Flood Light:
Super Bright LED, 6500K
Brightness/Run Time:
Flood Light Low: 100 lm / 8 hrs
Flood Light High: 300 lm / 3 hrs
High Quality 3.7V1500mAh
Li-Po Battery
Charging Time: 2.5 hrs
IP20, IK07

Weight (g): 180
Size (mm): 60x37x160



Emergency Light

TAKENOW®

WL2030

Weight (g): 160
Size (mm): 71x71x56.5



SPECIFICATIONS

Emergency Light: Super Bright LED, 2000K(Yellow)

Brightness/Run Time:

Rotating Mode : 60 lm / 80 cd / 9 hrs, SOS Mode: 190 lm / 70 cd / 12.5 hrs

Steady Mode: 190 lm / 70 cd / 8 hrs

High Quality 3.7V1500mAh Li-Po Battery, Charging Time: 2.5 hrs

IP65, IK07, **2 KM High Visibility**

WL2031

Weight (g): 118.5
Size (mm): 58x58x76.5



SPECIFICATIONS

Emergency Light: Super Bright LED, 2000K (Yellow)

Spot Light: Super Bright LED, 6500K (White)

Brightness/Run Time:

SOS Mode: 320 lm / 70 cd / 4.5 hrs, Lighting Mode: 60 lm / 12 hrs

High Quality 9V 6LR61 Battery

IP65, IK07, **2 KM High Visibility**

WL2032

Weight (g): 85
Size (mm): 70.6x70.6x52



SPECIFICATIONS

Emergency Light: Super Bright LED, 2000K(Yellow)

Spot Light: Super Bright LED, 6500K(White)

Brightness/Run Time:

SOS Mode: 220 lm / 70 cd / 15 hrs, Lighting Mode: 200 lm / 2.5 hrs

High Quality 3.7V750mAh Li-ion Battery, Charging Time: 2.5 hrs

IP65, IK07, **2 KM High Visibility**



2Km
High Visibility
SOS



2Km
High Visibility
SOS



QUICK COLOR CONTROLLER™

TAKENOW® **FLYCOLOR**



FS01



FLYCOLOR 2 featuring the patented metamerism matching technology, make it possible to ultimately close to the all day light, which can easily identify different colors of coatings containing metal, pearl, pearlescent powder and glass pigments.

Weight (g): 6700
Size (mm): 600x137x393

HL002

SPECIFICATIONS

Flood Light: High CRI and Three CCT COB LED
Ra 96+, CCT 2700K / 4500K / 6500K
Brightness/Run Time:
Flood Light: 160 lm / 3 hrs
High Quality 3.7V1500mAh Li-Po Battery
Charging Time: 2.5 hrs, IP65, IK07
Motion Sensor



Weight (g): 111
Size (mm): 78.5x47.5x42



WL4111S

SPECIFICATIONS

Flood Light: High CRI and three CCT COB LED
Ra 96+, CCT 2700K / 4500K / 6500K
Brightness/Run Time:
Flood Light Low: 250 lm / 3 hrs
Flood Light High: 500 lm / 3 hrs
(Auto system switch to Low mode after 5 minutes use at high mode)
High Quality 3.7V2600mAh Li-Ion Battery
Charging Time: 4 hrs, IP65, IK07



Weight (g): 305
Size (mm): 56x36x190



WL4118

SPECIFICATIONS

Flood Light: High CRI and multi CCT COB LED
Ra 96+, CCT 2700K/3500K/4500K/5500K/6500K
Brightness/Run Time:
Flood Light Low: 500 lm / 10 hrs
Flood Light Medium: 1000 lm / 5.5 hrs
Flood Light High: 2000 lm / 2.5 hrs
High Quality 11.1V5200mAh Li-Ion Battery
Charging Time: 3.5 hrs, IP65, IK07



Weight (g): 1170
Size (mm): 200x74x225



TD03



Patent Design
Quick Release Charging Adaptor
5M Rubber Power Cord



QUICK COLOR CONTROLLER™

FS03



ACCESSORIES LIST

- QUICK COLOR CONTROLLER™ WL4027..... x1
- 15V1.5A Universal Charger CHUN1515..... x1
- Wall-Mounted Charging Station PJ1070..... x1
- Tripod Adaptor PJ1080..... x1
- Work Light Tripod TD03..... x1
- Instruction Manual x1

Weight (g): 5800
Size (mm): 600x137x393

WL4027



SPECIFICATIONS

Flood Light: High CRI and Multi CCT COB LED, Ra 96+, CCT 2700K/3500K/4500K/5500K/6500K
Brightness/Run Time:
Flood Light ECO: 300 lm / 13 hrs
Flood Light Low: 600 lm / 6.5 hrs
Flood Light Medium: 1200 lm / 3 hrs
Flood Light High: 1800 lm / 2 hrs
Flood Light Ultra: 2400 lm / 1.7 hrs
High Quality 11.1V5200mAh Li-ion Battery
Charging Time: 3.5 hrs, IP20, IK07

Weight (g): 930
Size (mm): 159x77x223



The charging port on the handle



Wall-mounted Charging Station



This Side UP




Tripod and Tripod Adaptor

TD03 Optional



WL6112



SPECIFICATIONS

Flood light: High CRI and three CCT COB LED, Ra 96+, CCT 2700K/4500K/6500K
Brightness/Run time:
Flood light Low: 250lm/4 hours
Flood light High: 500lm/2 hours
(Hold switch 1second to change CCT)
High Quality 3.7V2600mAh Li-ion Battery
Charging time: 4 hours
IP65, IK07

Weight (g): 252
Size (mm): 93x88.5x30

UV CURING LIGHT KIT

66 Watts
 $\lambda_p = 395\text{nm}$

TAKENOW® FLYCURE 4



- Up to 1s curing time for some UV primer flashing off. Efficient ultrasonic range finder function.
- Only powers and emits UV-A. No harmful UV-B & C.
- Wall-Mounted charging station provides more convenient recharging process.
- Powerful irradiance with maximum UV-A intensity of 55,000 $\mu\text{W}/\text{cm}^2$ at 20 cm (8 inches).
- Efficient built-in cooling system keep light cool to maintain optimum light output during extended use.

FC04



ACCESSORIES LIST

- UV Curing Light WL4026 x 1
- 15V1.5A Universal Charger CHUN1515 x 1
- Universal Charger Adaptor x 1
- Wall-Mounted Charging Station PJ1070 ... x 1
- UV Protection Glasses x 1
- Instruction Manual x 1

The **FLYCURE 4** rechargeable UV curing light utilizes the latest ultra-hi-flux UV-A LED technology and focused through custom-designed optics to provide More efficient, Faster, and Safer for all automotive repair and industrial finishes works which uses ultraviolet light curable fillers, base coats (primers), top coats, and clear coatings etc.

GENERAL SPECIFICATIONS

Light Source	High Power UV LED
LED Light Watt	66 Watts
LED Lifetime	40,000 Hours
LED Wavelength	$\lambda_p = 395 \pm 5 \text{ nm}$
Battery Type	Li-ion 11.1V - 5200mAh, 57.72Wh
Battery Charging Time	3 Hours
Battery Charging Info	AC 100 - 240V~ 15V=1.5A
Running time	90 Minutes in Total (Max 10 minutes each use)
Light Weight	0.9 Kg (2 Lbs)
Light Size	159 x 223 x 77mm (6-1/4" x 8-3/4" x 3")
Light Body Material	Aluminium+Polyamide
Cooling System	Passive Thermal Management System enhanced with fan
Storage temperature	-20°C ~ +50°C (-4°F ~ 122°F)

Weight (g): 2950

Size (mm): 375x295x120



TECHNICAL SPECIFICATIONS

Ultrasonic Range Finder	Max400cm	
Temperature Control Function	Working $\leq 90^\circ\text{C}$ (194°F)	
Safety Protection Function	Double clicks 100ms	
Curing Distance	50mm(2")	200mm(8")
Curing Zone Dimensions	100mm x 100mm(4" x 4")	200mm x 200mm(8" x 8")
Curing Time	5-12 seconds*	30-80 seconds*
Average Irradiance	135 mW/cm2	36 mW/cm2
Peak Irradiance	200 mW/cm2	55 mW/cm2



The charging port on the handle



Wall-mounted Charging Station



Tripod and Tripod Adaptor



Underhood Light


TAKENOW[®]



TAKENOW® Underhood Light

MOBILE LIGHTING LEADER

WL7020

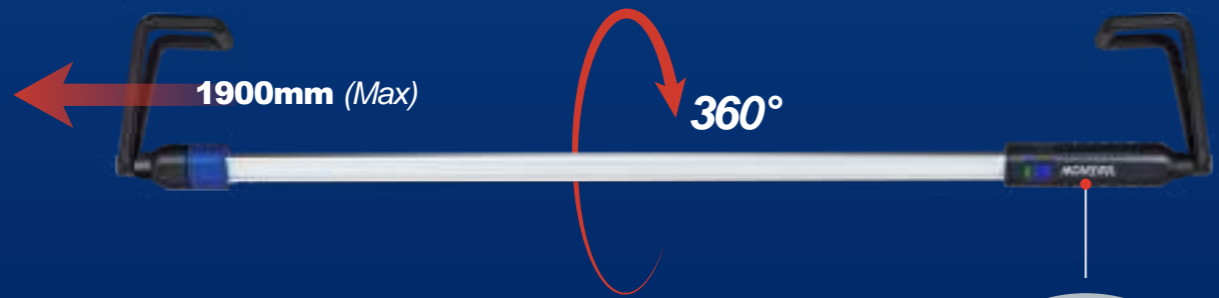

SPECIFICATIONS

Flood Light: Super bright SMD LED, 6500K

Brightness/Run Time:

Floodlight Low: 500 lm / 8.5 hrs, Floodlight Medium: 1000 lm / 5.5 hrs

Floodlight High: 2000 lm / 3 hrs

High Quality 3.6V4800mAh Li-Ion Battery, Charging Time:4 hrs, IP20, IK07

Weight (g): 1110.5

Regular (mm): 1170x110x180


Extend (mm): 1900 x110x180

2148AU

3.6V4800mAh

Battery Included


PJ1040



Weight (g): 1250

Regular (mm): 850x110x180

Extend (mm): 2100 x110x180

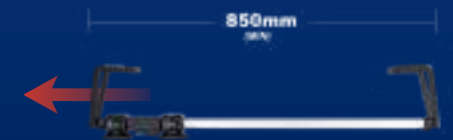

Flood&Area Light

TAKENOW®



WL4070&WL4073



WL4070 SPECIFICATIONS

Flood Light: Super Bright SMD LED, 6500K.

Brightness: Flood Light: 3000lm. 3 Meter 2x1.0 mm² H07RN-F.

Operating Voltage:100-240V AC 50/60 Hz. IP65, IK09.

CLASS II, Glare free

3000
lumens
Max

Weight (g): 1617
Size (mm): 273x85x205

WL4073 SPECIFICATIONS

Flood Light: Super Bright SMD LED, 6500K.

Brightness: Flood Light: 6500lm. 3 Meter 3G1.0 mm² H07RN-F.

Operating Voltage:100-240V AC 50/60 Hz. IP65, IK09.

CLASS I, Glare free

6500
lumens
Max

Weight (g): 2640
Size (mm): 273x85x205



TRIPOD MOUNTABLE

WL4071

SPECIFICATIONS

Flood Light:

Super Bright SMD LED, 6500K

Brightness:

Flood Light: 4000lm

5 Meter 3G1.5 mm² H07RN-F


Operating Voltage:100-240V AC

50/60 Hz. IP65, IK09

Power Socket Outlet:

Max 3200W

4000
lumens
Max



LINKABLE POWER SOCKET

Weight (g): 2640
Size (mm): 273x85x205

WL4072

SPECIFICATIONS

Flood Light:

Super Bright SMD LED, 6500K

Brightness/Run Time:

Flood Light ECO: 400 lm / 16 hrs

Flood Light Low: 1000 lm / 8 hrs

Flood Light Medium: 2000 lm / 4 hrs

Flood Light High: 5200 lm / 2 hrs

High Quality 11.1V5200mAh

Li-ion Battery

Charging Time: 3.5 hrs

IP65, IK07

CLASS III

Glare free

5200
lumens
Max

Weight (g): 1480
Size (mm): 273x85x205



WL4071 LINKABLE POWER SOCKET

WL5051

SPECIFICATIONS

Flood Light: Super Bright SMD LED, 6500K
Brightness: Flood Light: 4000lm
 Operating Voltage: 100-240V AC 50/60 Hz
 IP54, IK09
Power Socket Outlet: Max 3200W
CLASS I, Glare free

5 Meter 3G1.5mm²
 H07RN-F

Weight (g): 2500
 Size (mm): 157.5x157.5x285.6

4000
 lumens
 Max

MAG01
 Magnet
 Optional



LINKABLE
 POWER SOCKET



OVERHEAD
 LIGHTING

WL5050

SPECIFICATIONS

Flood Light:
 Super Bright SMD LED, 6500K
Brightness: Flood Light: 3200lm
 Operating Voltage: 100-240V AC
 50/60 Hz, IP65, IK10
CLASS II, Glare free

3 Meter 2x1.0 mm²
 H07RN-F

Weight (g): 1833
 Size (mm): 157.5x157.5x285.6

3200
 lumens
 Max



WL5052

SPECIFICATIONS

Flood Light:
 Super Bright SMD LED, 6500K
Brightness/Run Time:
 Flood Light ECO: 400 lm / 16.5 hrs
 Flood Light Low: 1000 lm / 8.5 hrs
 Flood Light Medium:
 2200 lm / 4.5 hrs
 Flood Light High: 5000 lm / 2 hrs
 High Quality 11.1V5200mAh
 Li-ion Battery
 Charging Time: 3.5 hrs
 IP65, IK09
CLASS III, Glare free

Weight (g): 1800
 Size (mm): 157.5x157.5x285.6

5000
 lumens
 Max




OPTIONAL
 MAGNET




TRIPOD
 MOUNTABLE

Best Compact Floodlight

With Power bank



Powerbank



Magnet (Option)



MAGNETIC BASE AVAILABLE

WL4080



SPECIFICATIONS

Flood Light: Super Bright COB LED, 6500K

Brightness/Run Time:

- Flood Light Eco: 150 lm / 25 hrs
- Flood Light Low: 375 lm / 12 hrs
- Flood Light Medium: 750 lm / 6 hrs
- Flood Light High: 1125 lm / 4 hrs
- Flood Light Ultra: 1500 lm / 3 hrs

High Quality 3.7V5200mAh Li-ion Battery

Charging Time: 3 hrs IP65, IK07

CLASS III USB Output Max5V2A

Weight (g): 630
Size (mm): 171x127x72

1500 lumens Max

WL4081



SPECIFICATIONS

Flood Light: Super Bright COB LED, 6500K

Brightness/Run Time:

- Flood Light Eco: 300 lm / 26 hrs
- Flood Light Low: 750 lm / 12.5 hrs
- Flood Light Medium: 1500 lm / 6.5 hrs
- Flood Light High: 2250 lm / 4 hrs
- Flood Light Ultra: 3000 lm / 3 hrs

High Quality 3.7V5200mAh Li-ion Battery

Charging Time: 3 hrs IP65, IK07

CLASS III USB Output Max5V2A

Weight (g): 950
Size (mm): 205x153x75

3000 lumens Max



TRIPOD MOUNTABLE



WATERPROOF

WL3018

3000
lumens
Max

SPECIFICATIONS

Flood Light:
Super Bright SMD LED, 6500K
Brightness/Run Time:
Flood Light Low: 750 lm / 5.5 hrs
Flood Light Medium: 1500 lm / 3.3 hrs
Flood Light High: 3000 lm / 1.8 hrs
High Quality 7.4V4400mAh Li-ion Battery
Charging Time: 3.5 hrs
IP65, IK07
USB Output Max5V2A
CLASS III

Weight (g): 1435
Size (mm): 289x289x309



360°
Adjustable Head



Power Bank



90°
Foldable Stand Design



WL5018

1000
lumens
Max

SPECIFICATIONS

Flood Light:
Super Bright SMD LED, 6500K
Brightness/Run Time:
Flood Light Low: 60 lm / 24 hrs
Flood Light High: 1000 lm / 1.8 hrs
High Quality 3.7V5200mAh Li-ion Battery
Charging Time: 3.5 hrs
IP54, IK07
Glare free
USB Output Max5V2A

Weight (g): 467
Size (mm): 75x75x260

Stepless Dimming Switch



180°
Adjustable Head



Power Bank



Hook and Magnet
on Bottom



WL4025

4500
lumens
Max

SPECIFICATIONS

Flood Light: Super Bright SMD LED, 5700K

Brightness/Run Time:

Flood Light ECO: 750 lm / 13 hrs

Flood Light Low: 1500 lm / 7 hrs

Flood Light Medium: 3000 lm / 3.5 hrs

Flood Light High: 4500 lm / 2.5 hrs

High Quality 14.8V5200mAh Li-ion Battery

Charging Time: 4 hrs, IP54, IK07

CLASS III

Detachable battery pack

USB Output Max5V2A

Weight (g): 2140

Size (mm): 176x173x288.5



135°
Vertical Rotation



180°
Horizontal Rotation



Power Bank



TRIPOD
MOUNTABLE

WL4211

4000
lumens
Max

SPECIFICATIONS

Flood Light:

Super Bright COB LED, 6500K

Brightness/Run Time:

Flood Light ECO: 400 lm / 20 hrs

Flood Light Low: 1000 lm / 10 hrs

Flood Light Medium: 2000 lm / 6 hrs

Flood Light High: 4000 lm / 3 hrs

High Quality 11.1V5200mAh Li-ion Battery

Charging Time: 4 hrs, IP65, IK07

CLASS III

USB Output Max5V1A

Weight (g): 1560

Size (mm): 210x100x210



140°
Adjustable Head



Hook on Bottom



Power Bank



WL4020

5300
lumens
Max

SPECIFICATIONS

Flood Light:
Super Bright COB LED, 6500K
Brightness/Run Time:
Flood Light Low: 1100 lm / 6.3 hrs
Flood Light Medium: 2200 lm / 3.5 hrs
Flood Light High: 5300 lm / 1.5 hrs
High Quality 11.1V5200mAh Li-ion Battery
Charging Time: 4.5 hrs
IP65, IK07
CLASS III
USB Output Max5V2A

Weight (g): 1355
Size (mm): 236.6x59x266



180°
Adjustable Head



Aluminium Structure
Ensures High
Performance



Power Bank



MAG01
Optional



**TRIPOD
MOUNTABLE**

WL4016

1800
lumens
Max

SPECIFICATIONS

Flood Light: Super Bright COB LED, 6500K
Brightness/Run Time: Flood Light Low: 300 lm / 9 hrs
Flood Light Medium: 600 lm / 5 hrs, Flood Light High: 1800 lm / 1.5 hrs, High Quality 11.1V2600mAh Li-ion Battery
Charging Time: 3.5 hrs, IP65, IK07
CLASS III

Weight (g): 703
Size (mm): 184.5x47.3x164.5



WL4018

4000
lumens
Max

SPECIFICATIONS

Flood Light: Super Bright COB LED, 6500K
Brightness/Run Time: Flood Light Low: 800 lm / 9 hrs,
Flood Light Medium: 1600 lm / 4 hrs,
Flood Light High: 4000 lm / 1.5 hrs,
High Quality 11.1V5200mAh Li-ion Battery, Charging Time: 3.5 hrs,
IP65, IK07 **CLASS III**

Weight (g): 1150
Size (mm): 225x70x200



Portable Power Station



TAKENOW®



PJ1030

SPECIFICATIONS

Battery Cell: High Quality 3.7V Li-ion battery

Capacity / Energy: 7,800mAh | 28.86Whh

Input: USB-C 5V 2A(Max)

Output: 5V2.4A /9V2A/12V1.5A

Charging Time: 5 hrs

Emergency Light:

Super Bright SMD LED, 6500K

Brightness/Run Time:

Emergency Light: 200 lm / 35 hrs

IP65, IK07

Weight (g): 265

Size (mm): 114x65x32